



# Nobilis i2071R1


---

## 1U Rackmount Server

- Dual Intel Xeon E5-2600 v3 processors
- Optional embedded LSI RAID controller
- Optional embedded dual 10GbE



**Supermicro SC813MFTQ-R400CB**

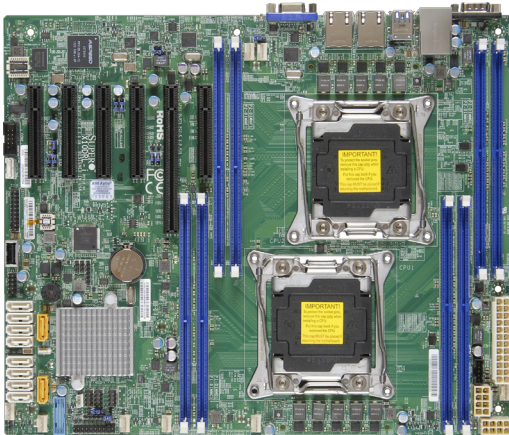

**Supermicro X10DRL-i Motherboard**

### I2071R1 SPECIFICATIONS

<b>Processor</b>	Dual Intel® Xeon® E5-2600 v3
<b>Chipset</b>	Intel C612
<b>Memory</b>	8x DDR4 2133MHz ECC DIMMs (512GB Max)
<b>Expansion</b>	3 PCI-E 3.0 x8, 1 PCI-E 3.0 x4 (in x8) 1 PCI-E 3.0 x16, 1 PCI-E 2.0 x4 (in x8)
<b>Networking</b>	Intel i210 GbE LAN x2
<b>Management</b>	Integrated IPMI 2.0 and KVM w/ dedicated LAN
<b>Storage</b>	10x SATA3 (6Gbps); RAID 0, 1, 5, 10
<b>I/O</b>	4x USB 3.0 ports (2 rear, 2 via header) 5x USB 2.0 (2 rear, 2 via header, 1 Type A)
<b>Form Factor</b>	1U Rackmount
<b>Drive Bays</b>	4x 3.5" hot swap
<b>Power</b>	400W redundant and 440W high efficiency
<b>Dimensions</b>	1.7" (H) x 17.2" (W) x 19.85" (D) x 33.5 lbs.
<b>Notes</b>	Above specifications based on X10DRL-I motherboard X10DRL-C includes embedded LSI-3108 RAID controller X10DRL-CT includes embedded LSI-3108 RAID controller and 2x 10GbE Other specifications vary based on motherboard selection

## Contact Information

Equus Computer Systems | [www.EquusCS.com](http://www.EquusCS.com) | 866-378-8727